


COVERCO®

10" SUBMERSIBLE PUMPS

CÔNG TY TNHH THƯƠNG MẠI VÀ CÔNG NGHIỆP NAM MINH

780 Minh Khai, Vĩnh Tuy, Hai Bà Trưng, Hà Nội • Hotline/Zalo 0964 988 688 – 0835 899 599 • bomnuoceu.vn

SS10108 10” Submersible Pump

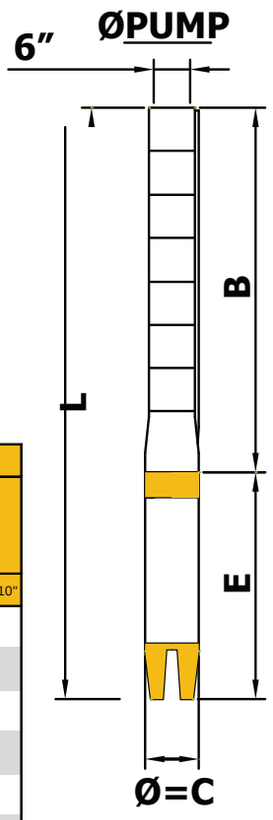

Operating range at 50 Hz: Q= 78 m^3/ h - 138 m^3/ h
Standard Outlet : 6” Inside Threaded 11 TPI (NPT : Optional)
Impeller type: Mixed flow
Rotation : CCW
Connection : According to NEMA Standard
Shaft Diameter : 32 mm
Minimum liquid level (NPSH) : 1200 mm from bottom of suction grid
Maximum pump (Wet end) diameter - (Including cable guard): 208 mm
Liquid being pomped: Chemically and mechanically non aggressive.
Maximum allowable solid quantity = 50 g/m^3
Solid dimension: Max 2mm


PUMP TYPE	MOTOR				DIMENSIONS (mm)														WEIGHT (kg)								
					10"-6"	10"-8"	10"-10"	6"	8"	10"	10"-6"	10"-8"	10"-10"	6"	8"	10"	ø PUMP	ø D	MOTOR			PUMP			TOTAL		
	6" HP	8" HP	10"MOT 8" NEMA HP	kW	L	L	L	E	E	E	B	B	B	ø = C	ø = C	ø = C			6"	8"	10"	10"-6"	10"-8"	10"-10"	10"-6"	10"-8"	10"-10"
SS 10108/01	10	-	-	7,5	1258	-	-	650	-	-	608	-	-	145	-	-	208	6"	48	-	-	30	-	-	78	-	-
SS 10108/02	20	-	-	15	1594	-	-	830	-	-	764	-	-	145	-	-	208	6"	66	-	-	36	-	-	102	-	-
SS 10108/03	30	30	-	22	1900	1850	-	980	930	-	920	920	-	145	195	-	208	6"	82	121	-	42	43	-	124	164	-
SS 10108/04	40	40	-	30	2186	2116	-	1110	1040	-	1076	1076	-	145	195	-	208	6"	98	140	-	48	50	-	146	190	-
SS 10108/05	50	50	-	37	2422	2302	-	1190	1070	-	1232	1232	-	145	195	-	208	6"	106	146	-	55	55	-	161	201	-
SS 10108/06	60	60	-	45	2658	2518	-	1270	1130	-	1388	1388	-	145	195	-	208	6"	116	158	-	61	62	-	177	220	-
SS 10108/07	-	70	-	52	-	2754	-	-	1210	-	-	1544	-	-	195	-	208	6"	-	177	-	-	68	-	-	245	-
SS 10108/08	-	80	-	59	-	2980	-	-	1280	-	-	1700	-	-	195	-	208	6"	-	190	-	-	74	-	-	264	-
SS 10108/09	-	90	-	66	-	3221	-	-	1365	-	-	1856	-	-	195	-	208	6"	-	204	-	-	80	-	-	284	-
SS 10108/10	-	100	-	75	-	3442	-	-	1430	-	-	2012	-	-	195	-	208	6"	-	218	-	-	86	-	-	304	-
SS 10108/11	-	110	-	81	-	3668	-	-	1500	-	-	2168	-	-	195	-	208	6"	-	230	-	-	92	-	-	322	-
SS 10108/12	-	125	125	92	-	3944	3668	-	1620	1344	-	2324	2324	-	195	232	208	6"	-	252	300	-	98	98	-	350	398
SS 10108/13	-	150	150	110	-	4285	3944	-	1805	1464	-	2480	2480	-	195	232	208	6"	-	292	330	-	104	104	-	396	434
SS 10108/14	-	150	150	110	-	4441	4100	-	1805	1464	-	2636	2636	-	195	232	208	6"	-	292	330	-	110	110	-	402	440
SS 10108/15	-	150	150	110	-	4597	4256	-	1805	1464	-	2792	2792	-	195	232	208	6"	-	292	330	-	116	116	-	408	446

PUMP TYPE	MOTOR				m^3/h	0	78	84	90	100	108	115	125	135	145
	6" HP	8" HP	10" MOT 8" NEMA	kW	l / sec	0,00	21,7	23,3	25,0	27,8	30,0	31,9	34,7	37,5	40,3
					gpm	0	343	370	396	440	476	506	550	594	638
SS 10108/01	10	-	-	7,5	Total Dynamic Head (TDH)	25	22	21	20	20	19	18	16	15	13
SS 10108/02	20	-	-	15		50	43	42	41	39	37	36	32	29	27
SS 10108/03	30	30	-	22		74	65	62	61	59	56	53	49	44	40
SS 10108/04	40	40	-	30		99	86	83	81	79	74	71	65	58	54
SS 10108/05	50	50	-	37		124	108	104	102	99	93	89	81	73	67
SS 10108/06	60	60	-	45		149	129	125	122	118	111	107	97	88	80
SS 10108/07	-	70	-	52		173	151	145	142	138	130	125	114	102	94
SS 10108/08	-	80	-	59		198	172	166	163	158	148	142	130	117	107
SS 10108/09	-	90	-	66		223	194	187	183	178	167	160	146	131	121
SS 10108/10	-	100	-	75		248	215	208	203	197	185	178	162	146	134
SS 10108/11	-	110	-	81		273	237	228	224	217	204	196	179	161	148
SS 10108/12	-	125	125	92		297	258	249	244	237	222	213	195	175	161
SS 10108/13	-	150	150	110		322	280	270	265	257	241	231	211	190	174
SS 10108/14	-	150	150	110		347	301	291	285	276	259	249	227	204	188
SS 10108/15	-	150	150	110		372	323	311	305	296	278	267	244	219	201

COVERCO®

CÔNG TY TNHH THƯƠNG MẠI VÀ CÔNG NGHIỆP NAM MINH
780 Minh Khai, Vĩnh Tuy, Hai Bà Trưng, Hà Nội • Hotline/Zalo 0964 988 688 – 0835 899 599 • bomnuoceu.vn


10” Submersible Pump - SS10108

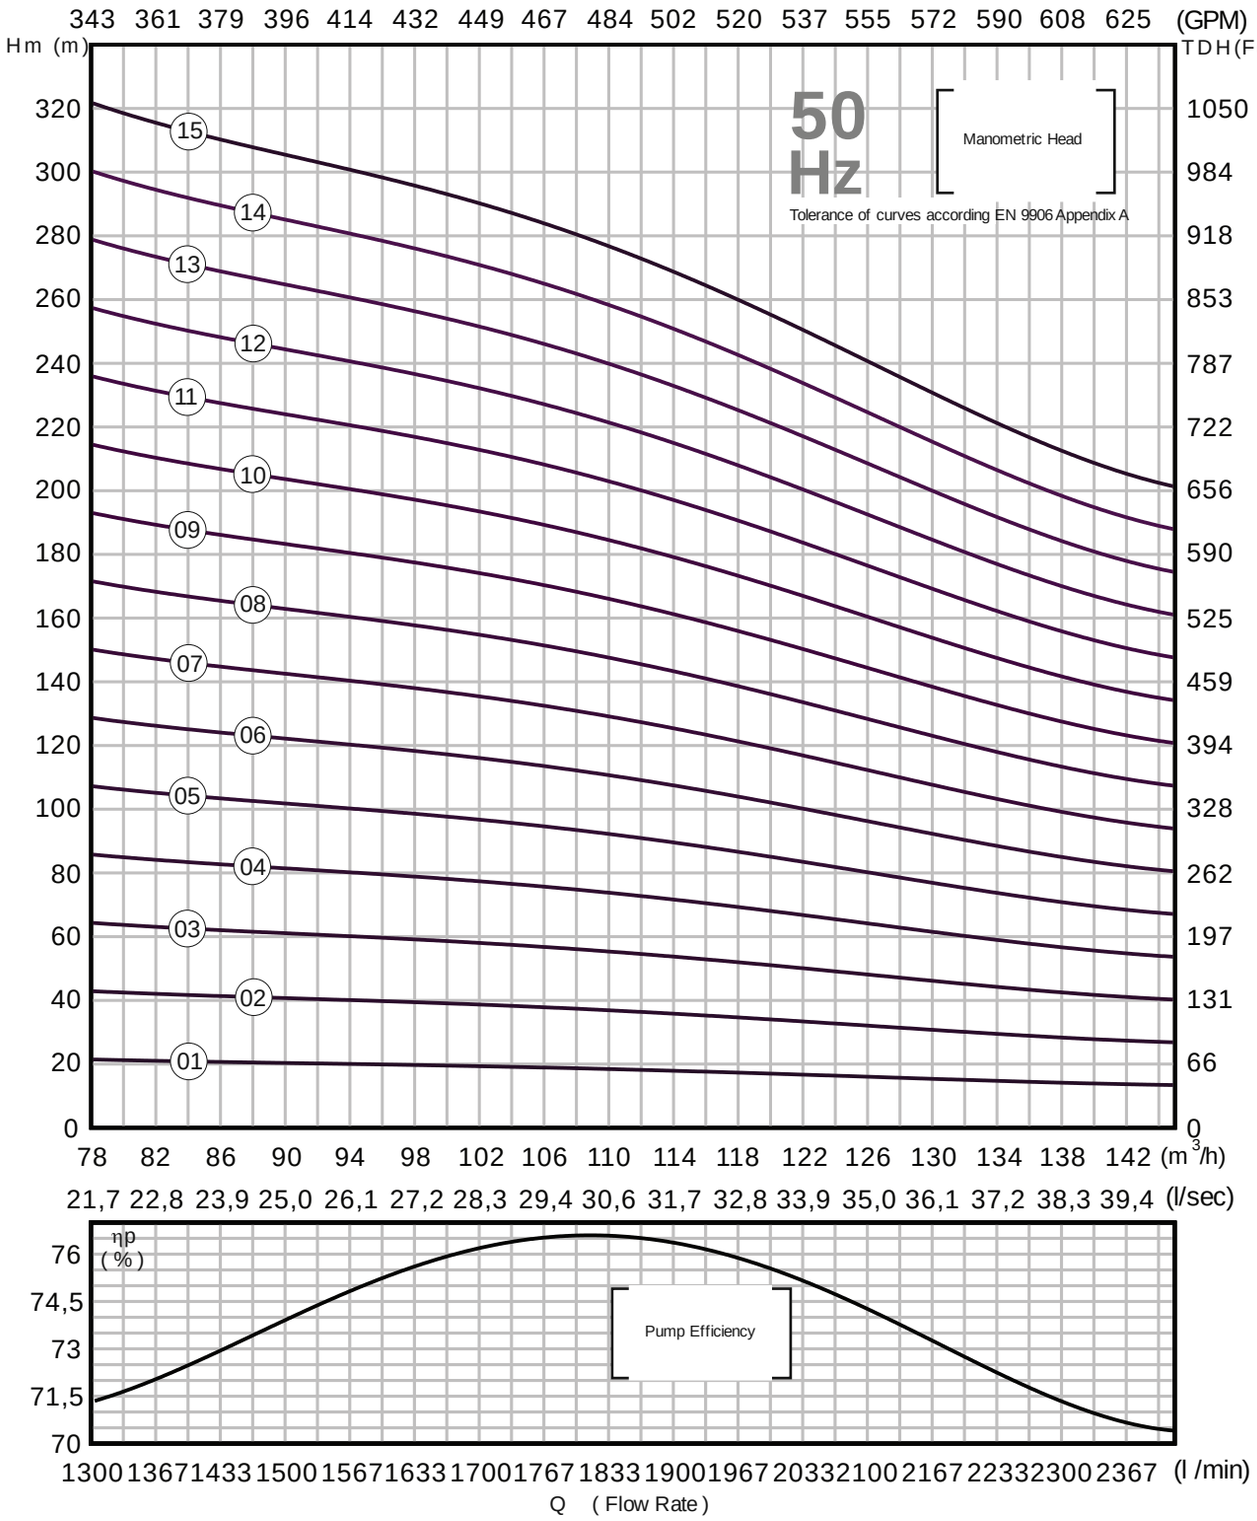

CÔNG TY TNHH THƯƠNG MẠI VÀ CÔNG NGHIỆP NAM MINH

780 Minh Khai, Vĩnh Tuy, Hai Bà Trưng, Hà Nội • Hotline/Zalo 0964 988 688 – 0835 899 599 • bomnuoceu.vn

SS10120 10” Submersible Pump

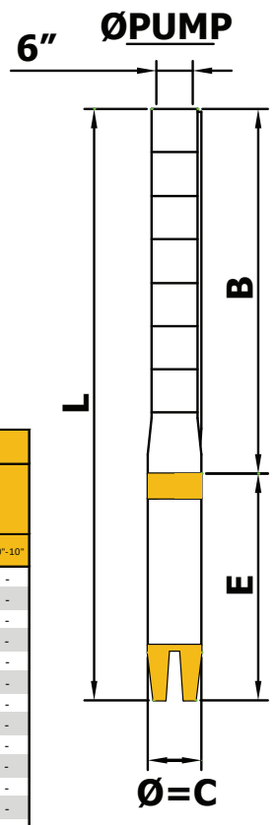

Operating range at 50 Hz: Q= 80 m^3/ h - 150 m^3/ h
Standard Outlet : 6” Inside Threaded 11 TPI (NPT : Optional)
Impeller type: Mixed flow
Rotation : CCW
Connection : According to NEMA Standard
Shaft Diameter : 32 mm

Minimum liquid level (NPSH) : 1200 mm from bottom of suction grid
Maximum pump (Wet end) diameter - (Including cable guard): 208 mm

Liquid being pomped: Chemically and mechanically non aggressive.
Maximum allowable solid quantity = 50 g/m^3
Solid dimension: Max 2mm


PUMP TYPE	MOTOR				DIMENSIONS (mm)															WEIGHT (kg)								
					10"-6"	10"-8"	10"-10"	6"	8"	10"	10"-6"	10"-8"	10"-10"	6"	8"	10"	ø PUMP	ø D	MOTOR			PUMP			TOTAL		
	6" HP	8" HP	10" MOT 8" NEMA HP	kW	L	L	L	E	E	E	B	B	B	ø = C	ø = C	ø = C			6"	8"	10"	10"-6"	10"-8"	10"-10"	10"-6"	10"-8"	10"-10"
SS 10120/1A	10	-	-	7,5	1258	-	-	650	-	-	608	-	-	145	-	-	208	6"	48	-	-	30	-	-	78	-	-
SS 10120/1	15	-	-	11	1338	-	-	730	-	-	608	-	-	145	-	-	208	6"	56	-	-	30	-	-	86	-	-
SS 10120/2A	20	-	-	15	1594	-	-	830	-	-	764	-	-	145	-	-	208	6"	66	-	-	36	-	-	102	-	-
SS 10120/2	30	30	-	22	1744	1694	-	980	930	-	764	764	-	145	195	-	208	6"	82	121	-	36	36	-	118	157	-
SS 10120/3AA	35	35	-	26	1950	1960	-	1030	1040	-	920	920	-	145	195	-	208	6"	88	140	-	42	42	-	130	182	-
SS 10120/3	40	40	-	30	2030	1960	-	1110	1040	-	920	920	-	145	195	-	208	6"	98	140	-	42	42	-	140	182	-
SS 10120/4AAA	50	50	-	37	2266	2146	-	1190	1070	-	1076	1076	-	145	195	-	208	6"	106	146	-	50	50	-	156	196	-
SS 10120/4AA	50	50	-	37	2266	2146	-	1190	1070	-	1076	1076	-	145	195	-	208	6"	106	146	-	50	50	-	156	196	-
SS 10120/4A	50	50	-	37	2266	2146	-	1190	1070	-	1076	1076	-	145	195	-	208	6"	106	146	-	50	50	-	156	196	-
SS 10120/4	60	60	-	45	2346	2206	-	1270	1130	-	1076	1076	-	145	195	-	208	6"	116	158	-	50	50	-	166	208	-
SS 10120/5AAA	60	60	-	45	2502	2362	-	1270	1130	-	1232	1232	-	145	195	-	208	6"	116	158	-	55	55	-	171	213	-
SS 10120/5AA	60	60	-	45	2502	2362	-	1270	1130	-	1232	1232	-	145	195	-	208	6"	116	158	-	55	55	-	171	213	-
SS 10120/5	-	70	-	52	-	2442	-	-	1210	-	-	1232	-	-	195	-	208	6"	-	177	-	-	55	-	-	232	-
SS 10120/6AAA	-	70	-	52	-	2598	-	-	1210	-	-	1388	-	-	195	-	208	6"	-	177	-	-	62	-	-	239	-
SS 10120/6AA	-	75	-	55	-	2638	-	-	1250	-	-	1388	-	-	195	-	208	6"	-	184	-	-	62	-	-	246	-
SS 10120/6	-	80	-	59	-	2668	-	-	1280	-	-	1388	-	-	195	-	208	6"	-	190	-	-	62	-	-	252	-
SS 10120/7AA	-	90	-	66	-	2909	-	-	1365	-	-	1544	-	-	195	-	208	6"	-	204	-	-	68	-	-	272	-
SS 10120/7A	-	90	-	66	-	2909	-	-	1365	-	-	1544	-	-	195	-	208	6"	-	204	-	-	68	-	-	272	-
SS 10120/7	-	100	-	75	-	2974	-	-	1430	-	-	1544	-	-	195	-	208	6"	-	218	-	-	68	-	-	286	-
SS 10120/8AAA	-	100	-	75	-	3130	-	-	1430	-	-	1700	-	-	195	-	208	6"	-	218	-	-	74	-	-	292	-
SS 10120/8AA	-	100	-	75	-	3130	-	-	1430	-	-	1700	-	-	195	-	208	6"	-	218	-	-	74	-	-	292	-
SS 10120/8	-	110	-	81	-	3200	-	-	1500	-	-	1700	-	-	195	-	208	6"	-	230	-	-	74	-	-	304	-
SS 10120/9AAA	-	110	-	81	-	3356	-	-	1500	-	-	1856	-	-	195	-	208	6"	-	230	-	-	80	-	-	310	-
SS 10120/9	-	125	125	92	-	3476	3200	-	1620	1344	-	1856	1856	-	195	232	208	6"	-	252	300	-	80	80	-	332	380
SS 10120/10AAA	-	125	125	92	-	3632	3356	-	1620	1344	-	2012	2012	-	195	232	208	6"	-	252	300	-	86	86	-	338	386
SS 10120/10AA	-	125	125	92	-	3632	3356	-	1620	1344	-	2012	2012	-	195	232	208	6"	-	252	300	-	86	86	-	338	386
SS 10120/10A	-	150	150	110	-	3817	3476	-	1805	1464	-	2012	2012	-	195	232	208	6"	-	292	330	-	86	86	-	378	416
SS 10120/10	-	150	150	110	-	3817	3476	-	1805	1464	-	2012	2012	-	195	232	208	6"	-	292	330	-	86	86	-	378	416
SS 10120/11	-	150	150	110	-	3973	3632	-	1805	1464	-	2168	2168	-	195	232	208	6"	-	292	330	-	92	92	-	384	422
SS 10120/12AAA	-	150	150	110	-	4129	3788	-	1805	1464	-	2324	2324	-	195	232	208	6"	-	292	330	-	99	99	-	391	429

PUMP TYPE	MOTOR				m³/h	0	80	90	100	110	120	125	130	135	140	145	150
	6" HP	8" HP	10" MOT 8" NEMA	kW	l / sec	0,00	22,2	25,0	27,8	30,6	33,3	34,7	36,1	37,5	38,9	40,3	41,7
					gpm	0	352	396	440	484	528	550	572	594	616	638	661
SS 10120/1A	10	-	-	7,5	Total Dynamic Head (TDH)	25	21	20	20	18	17	16	16	15	14	13	11
SS 10120/1	15	-	-	11		29	25	24	23	22	21	21	20	19	18	18	17
SS 10120/2A	20	-	-	15		53	46	45	43	41	38	37	36	34	32	31	28
SS 10120/2	30	30	-	22		57	50	49	47	45	43	41	40	38	37	36	34
SS 10120/3AA	35	35	-	26		78	68	65	63	59	56	53	51	48	46	45	40
SS 10120/3	40	40	-	30		86	76	73	70	67	64	62	60	58	55	53	50
SS 10120/4AAA	50	50	-	37		103	89	85	83	78	73	69	67	63	60	58	51
SS 10120/4AA	50	50	-	37		107	93	90	86	82	77	74	71	68	65	62	56
SS 10120/4A	50	50	-	37		111	97	94	90	86	81	78	76	72	69	67	62
SS 10120/4	60	60	-	45		115	101	98	94	90	85	83	80	77	74	71	67
SS 10120/5AAA	60	60	-	45		132	114	110	106	100	94	90	87	82	79	76	68
SS 10120/5AA	60	60	-	45		136	118	114	110	104	98	94	91	87	83	80	73
SS 10120/5	-	70	-	52		144	126	122	117	112	107	103	100	96	92	89	84
SS 10120/6AAA	-	70	-	52		160	139	134	129	123	115	111	107	101	97	94	85
SS 10120/6AA	-	75	-	55		164	143	138	133	127	120	115	111	106	102	98	90
SS 10120/6	-	80	-	59		172	151	146	140	134	128	124	120	115	111	107	101
SS 10120/7AA	-	90	-	66		193	169	163	156	149	141	136	131	125	120	116	107
SS 10120/7A	-	90	-	66		197	173	167	160	153	145	140	136	130	125	120	113
SS 10120/7	-	100	-	75		201	176	171	164	157	150	144	140	134	129	125	118
SS 10120/8AAA	-	100	-	75		218	190	183	176	167	158	152	147	140	134	129	119
SS 10120/8AA	-	100	-	75		222	194	187	180	171	162	156	151	144	139	134	124
SS 10120/8	-	110	-	81		230	202	195	187	179	171	165	160	153	148	143	135
SS 10120/9AAA	-	110	-	81		247	215	208	200	190	180	173	167	159	153	147	136
SS 10120/9	-	125	125	92		258	227	220	211	202	192	186	180	173	166	160	152
SS 10120/10AAA	-	125	125	92		275	240	232	223	212	201	193	187	178	171	165	153
SS 10120/10AA	-	125	125	92		279	244	236	227	216	205	198	191	183	176	169	158
SS 10120/10A	-	150	150	110		283	248	240	230	220	209	202	196	187	180	174	163
SS 10120/10	-	150	150	110		287	252	244	234	224	214	206	200	192	185	178	169
SS 10120/11	-	150	150	110		316	277	269	257	247	235	227	220	211	203	196	186
SS 10120/12AAA	-	150	150	110		333	291	281	270	257	244	234	227	216	208	201	187

COVERCO®

CÔNG TY TNHH THƯƠNG MẠI VÀ CÔNG NGHIỆP NAM MINH
780 Minh Khai, Vĩnh Tuy, Hai Bà Trưng, Hà Nội • Hotline/Zalo 0964 988 688 – 0835 899 599 • bomnuoceu.vn


10” Submersible Pump - SS10120

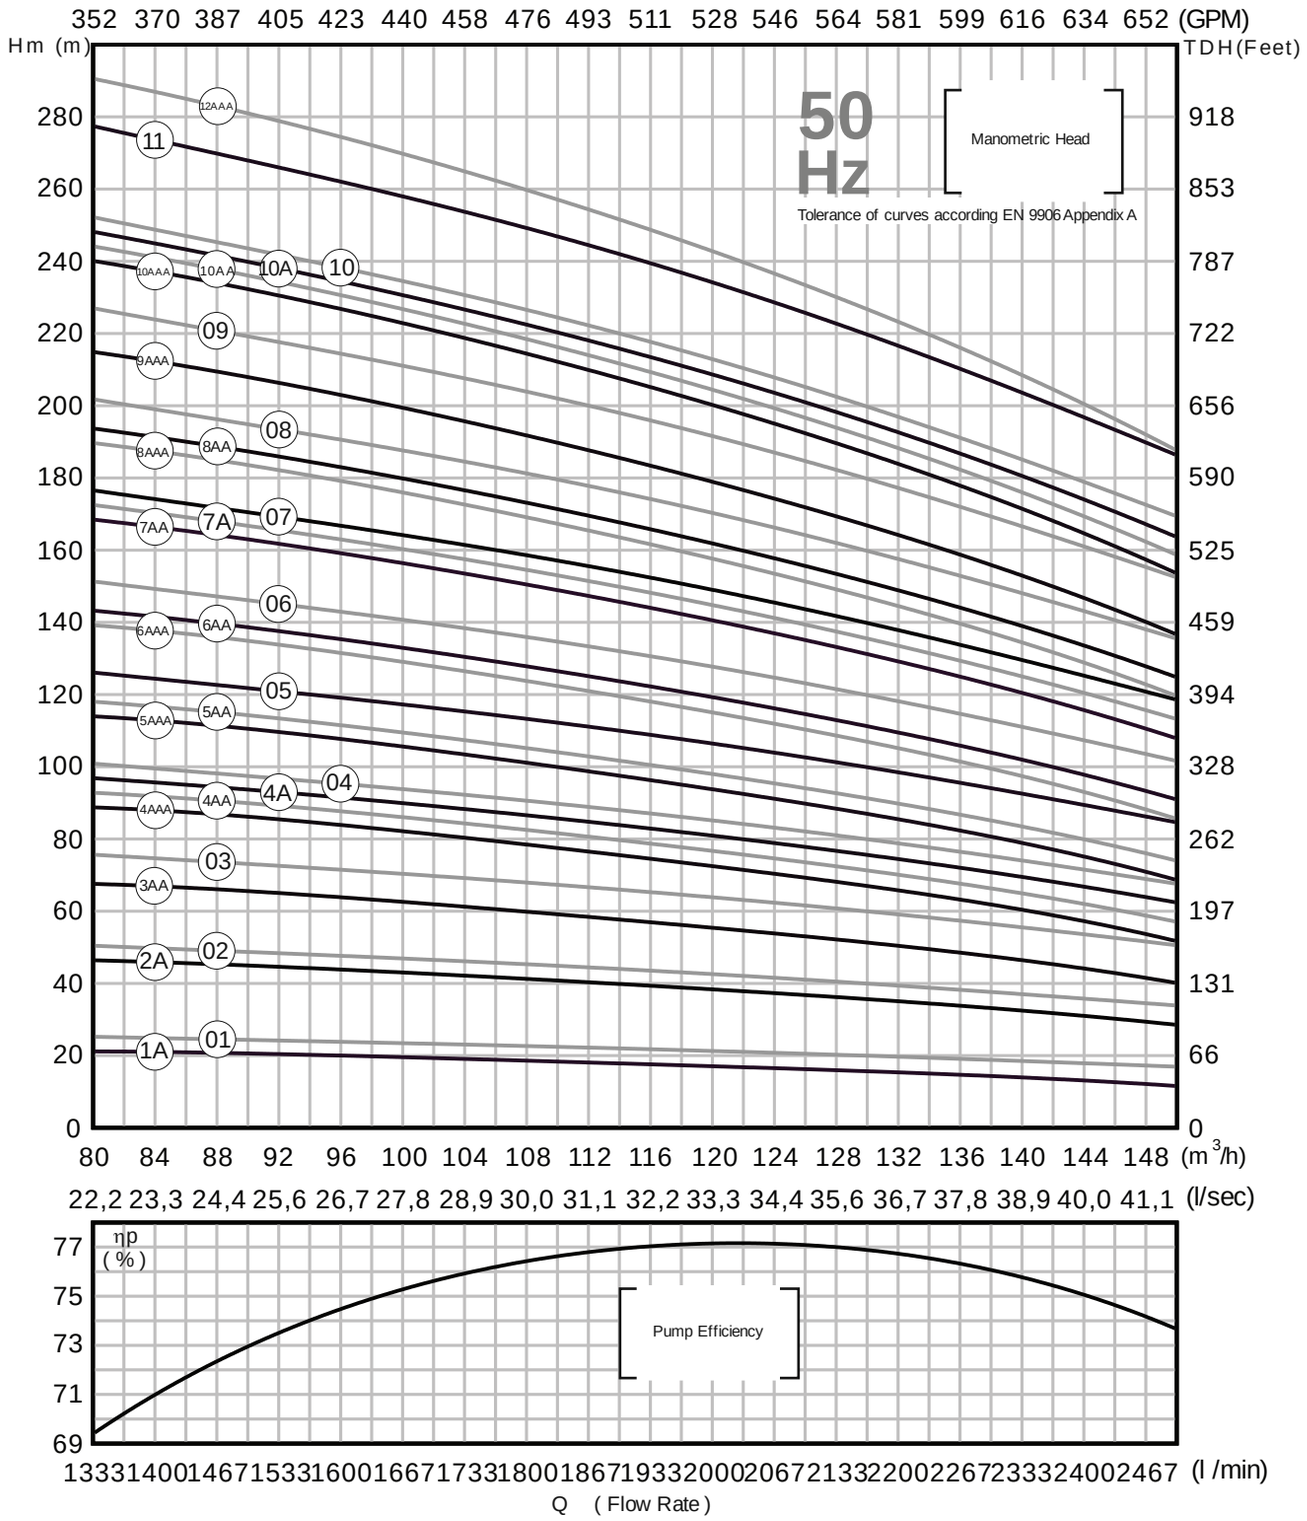

CÔNG TY TNHH THƯƠNG MẠI VÀ CÔNG NGHIỆP NAM MINH

780 Minh Khai, Vĩnh Tuy, Hai Bà Trưng, Hà Nội • Hotline/Zalo 0964 988 688 – 0835 899 599 • bomnuoceu.vn

SS10160 10” Submersible Pump

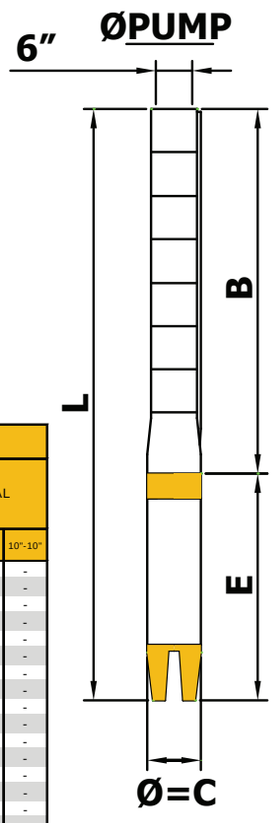

Operating range at 50 Hz: Q= 100 m^3/ h - 200 m^3/ h
Standard Outlet : 6” Inside Threaded 11 TPI (NPT : Optional)
Impeller type: Mixed flow
Rotation : CCW
Connection : According to NEMA Standard
Shaft Diameter : 32 mm
Minimum liquid level (NPSH) : 1200 mm from bottom of suction grid
Maximum pump (Wet end) diameter - (Including cable guard): 208 mm
Liquid being pomped: Chemically and mechanically non aggressive.
Maximum allowable solid quantity = 50 g/m^3
Solid dimension: Max 2mm


PUMP TYPE	MOTOR				DIMENSIONS (mm)														WEIGHT (kg)								
					10"-6"	10"-8"	10"-10"	6"	8"	10"	10"-6"	10"-8"	10"-10"	6"	8"	10"	ø PUMP	ø D	MOTOR			PUMP			TOTAL		
	6" HP	8" HP	10" MOT 8" NEMA HP	kW	L	L	L	E	E	E	B	B	B	ø = C	ø = C	ø = C			6"	8"	10"	10"-6"	10"-8"	10"-10"	10"-6"	10"-8"	10"-10"
SS 10160/1A	12,5	-	-	9,2	1298	-	-	690	-	-	608	-	-	145	-	-	208	6"	50	-	-	30	-	-	80	-	-
SS 10160/01	15	-	-	11	1338	-	-	730	-	-	608	-	-	145	-	-	208	6"	56	-	-	30	-	-	86	-	-
SS 10160/2AA	25	-	-	18,5	1644	-	-	880	-	-	764	-	-	145	-	-	208	6"	72	-	-	36	-	-	108	-	-
SS 10160/2A	30	30	-	22	1744	1694	-	980	930	-	764	764	-	145	195	-	208	6"	82	121	-	36	37	-	118	158	-
SS 10160/02	30	30	-	22	1744	1694	-	980	930	-	764	764	-	145	195	-	208	6"	82	121	-	36	37	-	118	158	-
SS 10160/3AAA	40	40	-	30	2030	1960	-	1110	1040	-	920	920	-	145	195	-	208	6"	98	140	-	43	43	-	141	183	-
SS 10160/3AA	40	40	-	30	2030	1960	-	1110	1040	-	920	920	-	145	195	-	208	6"	98	140	-	43	43	-	141	183	-
SS 10160/03A	50	50	-	37	2110	1990	-	1190	1070	-	920	920	-	145	195	-	208	6"	106	146	-	43	43	-	149	189	-
SS 10160/03	50	50	-	37	2110	1990	-	1190	1070	-	920	920	-	145	195	-	208	6"	106	146	-	43	43	-	149	189	-
SS 10160/04AAA	60	60	-	45	2346	2206	-	1270	1130	-	1076	1076	-	145	195	-	208	6"	116	158	-	49	50	-	165	208	-
SS 10160/04AA	60	60	-	45	2346	2206	-	1270	1130	-	1076	1076	-	145	195	-	208	6"	116	158	-	49	50	-	165	208	-
SS 10160/04A	60	60	-	45	2346	2206	-	1270	1130	-	1076	1076	-	145	195	-	208	6"	116	158	-	49	50	-	165	208	-
SS 10160/04	60	60	-	45	2346	2206	-	1270	1130	-	1076	1076	-	145	195	-	208	6"	116	158	-	49	50	-	165	208	-
SS 10160/5AAA	-	70	-	52	-	2442	-	-	1210	-	-	1232	-	-	195	-	208	6"	-	177	-	-	56	-	-	233	-
SS 10160/05AA	-	70	-	52	-	2442	-	-	1210	-	-	1232	-	-	195	-	208	6"	-	177	-	-	56	-	-	233	-
SS 10160/05A	-	75	-	55	-	2482	-	-	1250	-	-	1232	-	-	195	-	208	6"	-	184	-	-	56	-	-	240	-
SS 10160/05	-	75	-	55	-	2482	-	-	1250	-	-	1232	-	-	195	-	208	6"	-	184	-	-	56	-	-	240	-
SS 10160/06AAA	-	80	-	59	-	2668	-	-	1280	-	-	1388	-	-	195	-	208	6"	-	190	-	-	63	-	-	253	-
SS 10160/06AA	-	90	-	66	-	2753	-	-	1365	-	-	1388	-	-	195	-	208	6"	-	204	-	-	63	-	-	267	-
SS 10160/06A	-	90	-	66	-	2753	-	-	1365	-	-	1388	-	-	195	-	208	6"	-	204	-	-	63	-	-	267	-
SS 10160/06	-	90	-	66	-	2753	-	-	1365	-	-	1388	-	-	195	-	208	6"	-	204	-	-	63	-	-	267	-
SS 10160/07AAA	-	100	-	75	-	2974	-	-	1430	-	-	1544	-	-	195	-	208	6"	-	218	-	-	69	-	-	287	-
SS 10160/07AA	-	100	-	75	-	2974	-	-	1430	-	-	1544	-	-	195	-	208	6"	-	218	-	-	69	-	-	287	-
SS 10160/07A	-	110	-	81	-	3044	-	-	1500	-	-	1544	-	-	195	-	208	6"	-	230	-	-	69	-	-	299	-
SS 10160/07	-	110	-	81	-	3044	-	-	1500	-	-	1544	-	-	195	-	208	6"	-	230	-	-	69	-	-	299	-
SS 10160/08AAA	-	125	125	92	-	3320	3044	-	1620	1344	-	1700	1700	-	195	232	208	6"	-	252	300	-	76	76	-	328	376
SS 10160/08AA	-	125	125	92	-	3320	3044	-	1620	1344	-	1700	1700	-	195	232	208	6"	-	252	300	-	76	76	-	328	376
SS 10160/08A	-	125	125	92	-	3320	3044	-	1620	1344	-	1700	1700	-	195	232	208	6"	-	252	300	-	76	76	-	328	376
SS 10160/08	-	125	125	92	-	3320	3044	-	1620	1344	-	1700	1700	-	195	232	208	6"	-	252	300	-	76	76	-	328	376
SS 10160/09AAA	-	125	125	92	-	3476	3200	-	1620	1344	-	1856	1856	-	195	232	208	6"	-	252	300	-	82	82	-	334	382
SS 10160/09AA	-	150	150	110	-	3661	3320	-	1805	1464	-	1856	1856	-	195	232	208	6"	-	292	330	-	82	82	-	374	412
SS 10160/09A	-	150	150	110	-	3661	3320	-	1805	1464	-	1856	1856	-	195	232	208	6"	-	292	330	-	82	82	-	374	412
SS 10160/09	-	150	150	110	-	3661	3320	-	1805	1464	-	1856	1856	-	195	232	208	6"	-	292	330	-	82	82	-	374	412
SS 10160/10AAA	-	150	150	110	-	3817	3476	-	1805	1464	-	2012	2012	-	195	232	208	6"	-	292	330	-	89	89	-	381	419
SS 10160/10AA	-	150	150	110	-	3817	3476	-	1805	1464	-	2012	2012	-	195	232	208	6"	-	292	330	-	89	89	-	381	419
SS 10160/10A	-	150	150	110	-	3817	3476	-	1805	1464	-	2012	2012	-	195	232	208	6"	-	292	330	-	89	89	-	381	419
SS 10160/10	-	150	150	110	-	3817	3476	-	1805	1464	-	2012	2012	-	195	232	208	6"	-	292	330	-	89	89	-	381	419

PUMP TYPE	MOTOR				m³/h	0	120	130	140	150	155	160	165	170	180	190	200
	6" HP	8" HP	10" MOT 8" NEMA	kW	l / sec	0,00	33,3	36,1	38,9	41,7	43,1	44,4	45,8	47,2	50,0	52,8	55,6
					gpm	0	528	572	616	661	683	705	727	749	793	837	881
SS 10160/1A	12,5	-	-	9,2	Total Dynamic Head (TDH)	28	19	18	18	16	15	15	15	14	12	10	9
SS 10160/01	15	-	-	11		32	23	22	22	21	20	20	19	19	17	16	13
SS 10160/2AA	25	-	-	18,5		56	38	37	35	33	31	30	29	27	24	21	18
SS 10160/2A	30	30	-	22		60	42	41	39	37	36	35	34	32	29	26	22
SS 10160/02	30	30	-	22		63	46	45	43	42	41	40	38	37	34	31	26
SS 10160/3AAA	40	40	-	30		84	57	55	53	49	46	45	44	41	37	31	27
SS 10160/3AA	40	40	-	30		87	61	59	57	54	51	50	48	46	42	36	31
SS 10160/03A	50	50	-	37		91	65	63	61	58	56	55	53	51	46	42	35
SS 10160/03	50	50	-	37		95	68	67	65	62	61	60	58	56	51	47	40
SS 10160/04AAA	60	60	-	45		115	80	78	74	70	67	65	63	60	54	47	40
SS 10160/04AA	60	60	-	45		119	84	81	78	74	72	70	68	65	59	52	44
SS 10160/04A	60	60	-	45		123	87	85	82	79	77	75	72	69	64	57	48
SS 10160/04	60	60	-	45		126	91	89	86	83	82	79	77	74	68	63	53
SS 10160/5AAA	-	70	-	52		147	103	100	96	91	87	85	82	78	71	62	53
SS 10160/05AA	-	70	-	52		151	107	104	100	95	92	90	87	83	76	68	57
SS 10160/05A	-	75	-	55		154	110	107	104	100	97	94	91	88	81	73	62
SS 10160/05	-	75	-	55		158	114	111	108	104	102	99	96	93	86	78	66
SS 10160/06AAA	-	80	-	59		179	126	122	118	112	108	105	101	97	88	78	66
SS 10160/06AA	-	90	-	66		182	129	126	122	116	113	109	106	102	93	83	71
SS 10160/06A	-	90	-	66		186	133	130	126	120	118	114	111	107	98	89	75
SS 10160/06	-	90	-	66		190	137	134	129	125	123	119	115	111	103	94	79
SS 10160/07AAA	-	100	-	75		210	148	144	139	132	128	124	121	115	105	94	79
SS 10160/07AA	-	100	-	75		214	152	148	143	137	133	129	125	120	110	99	84
SS 10160/07A	-	110	-	81		218	156	152	147	141	138	134	130	125	115	104	88
SS 10160/07	-	110	-	81		221	160	156	151	145	143	139	135	130	120	109	92
SS 10160/08AAA	-	125	125	92		242	171	167	161	153	149	144	140	134	122	109	93
SS 10160/08AA	-	125	125	92		245	175	170	165	157	154	149	144	139	127	115	97
SS 10160/08A	-	125	125	92		249	179	174	169	162	159	154	149	144	132	120	101
SS 10160/08	-	125	125	92		253	182	178	173	166	164	159	154	149	137	125	106
SS 10160/09AAA	-	125	125	92		273	194	189	182	174	169	164	159	153	139	125	106
SS 10160/09AA	-	150	150	110		277	198	193	186	178	174	169	164	157	144	130	110
SS 10160/09A	-	150	150	110		281	201	196	190	183	179	174	168	162	149	135	114
SS 10160/09	-	150	150	110		284	205	200	194	187	184	179	173	167	154	141	119
SS 10160/10AAA	-	150	150	110		305	217	211	204	195	190	184	178	171	157	140	119
SS 10160/10AA	-	150	150	110		309	221	215	208	199	194	189	183	176	161	146	123
SS 10160/10A	-	150	150	110		312	224	219	212	203	199	194	188	181	166	151	128
SS 10160/10	-	150	150	110		316	228	223	216	208	204	199	192	186	171	156	132

COVERCO®

CÔNG TY TNHH THƯƠNG MẠI VÀ CÔNG NGHIỆP NAM MINH
780 Minh Khai, Vĩnh Tuy, Hai Bà Trưng, Hà Nội • Hotline/Zalo 0964 988 688 – 0835 899 599 • bomnuoceu.vn


10” Submersible Pump - SS10160

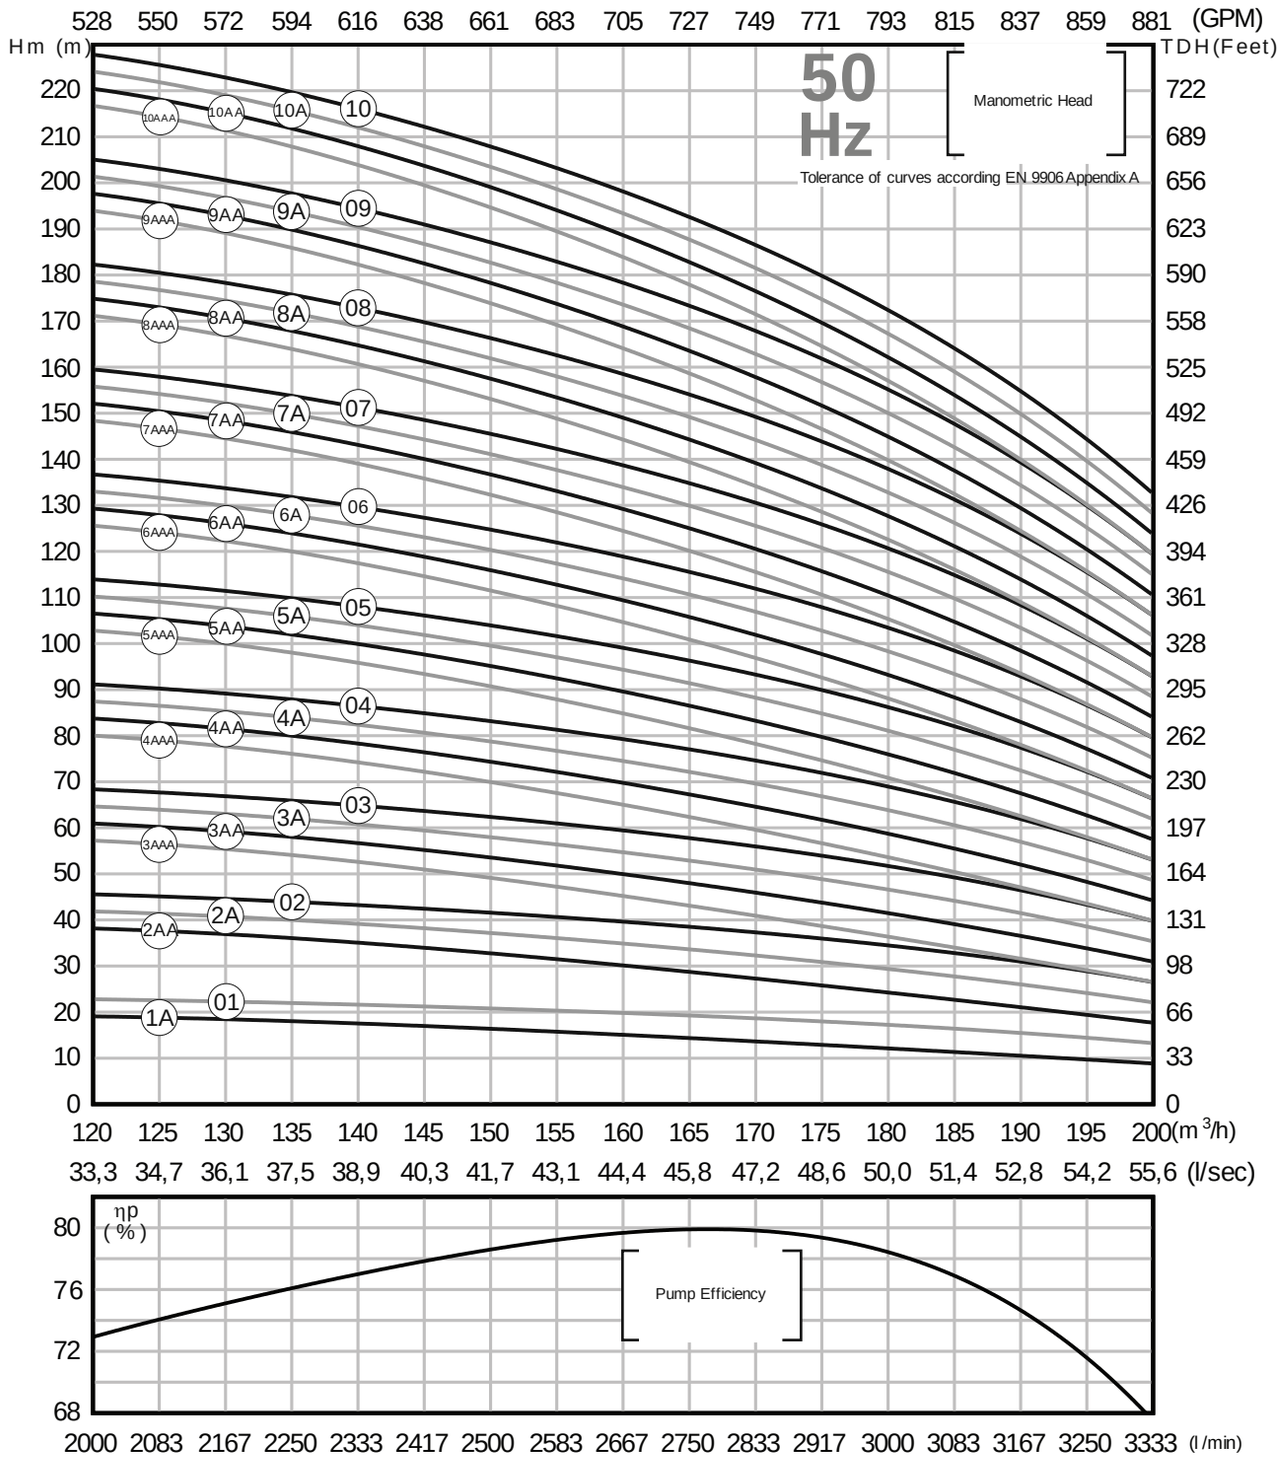

CÔNG TY TNHH THƯƠNG MẠI VÀ CÔNG NGHIỆP NAM MINH

780 Minh Khai, Vĩnh Tuy, Hai Bà Trưng, Hà Nội • Hotline/Zalo 0964 988 688 – 0835 899 599 • bomnuoceu.vn

SS10215 10” Submersible Pump

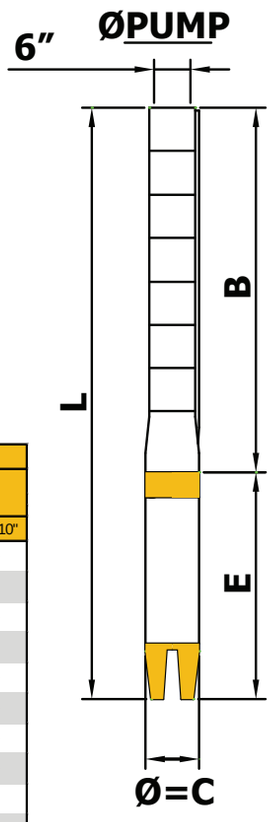

Operating range at 50 Hz: Q= 150 m^3/ h - 270 m^3/ h
Standard Outlet : 6” Inside Threaded 11 TPI (NPT : Optional)
Impeller type: Mixed flow
Rotation : CCW
Connection : According to NEMA Standard
Shaft Diameter : 45 mm

Minimum liquid level (NPSH) : 1200 mm from bottom of suction grid
Maximum pump (Wet end) diameter - (Including cable guard): 232 mm

Liquid being pomped: Chemically and mechanically non aggressive.
Maximum allowable solid quantity = 50 g/m^3
Solid dimension: Max 2mm


PUMP TYPE	MOTOR			DIMENSIONS (mm)									WEIGHT (kg)				
				10"-8"	10"-10"	8"	10"	10"	8"	10"	ø PUMP	ø D	MOTOR		PUMP	TOTAL	
	8" HP	10" HP	kW	L	L	E	E	B	ø = C	ø = C			8"	10"	10"-8"	10"-8"	10"-10"
SS 10215/1A	30	-	22	1706	-	930	-	776	195	-	232	6"	121	-	51,6	172,6	-
SS 10215/01	30	-	22	1706	-	930	-	776	195	-	232	6"	121	-	51,6	172,6	-
SS 10215/2AA	40	-	30	1992	-	1040	-	952	195	-	232	6"	140	-	60,7	200,7	-
SS 10215/02	50	-	37	2022	-	1070	-	952	195	-	232	6"	146	-	60,7	206,7	-
SS 10215/3AAA	60	-	45	2258	-	1130	-	1128	195	-	232	6"	158	-	69,8	227,8	-
SS 10215/03A	70	-	52	2338	-	1210	-	1128	195	-	232	6"	177	-	69,8	247	-
SS 10215/03	75	-	55	2378	-	1250	-	1128	195	-	232	6"	184	-	69,8	254	-
SS 10215/04AAAA	80	-	59	2584	-	1280	-	1304	195	-	232	6"	190	-	78,9	269	-
SS 10215/04AA	90	-	66	2669	-	1365	-	1304	195	-	232	6"	204	-	78,9	283	-
SS 10215/04	100	-	75	2734	-	1430	-	1304	195	-	232	6"	218	-	78,9	297	-
SS 10215/05AAA	110	-	81	2980	-	1500	-	1480	195	-	232	6"	230	-	88	318	-
SS 10215/05	125	125	92	3100	2824	1620	1344	1480	195	240	232	6"	252	300	88	340	388
SS 10215/06	150	150	110	3461	3120	1805	1464	1656	195	240	232	6"	292	330	97,1	389	427
SS 10215/07	-	180	132	-	3416	-	1584	1832	-	240	232	6"	-	370	106,2	-	476
SS 10215/08	-	200	147	-	3682	-	1674	2008	-	240	232	6"	-	400	115,3	-	515
SS 10215/10	-	250	185	-	4058	-	1874	2184	-	240	232	6"	-	464	124,4	-	588

PUMP TYPE	MOTOR			m^3/h	0	150	170	190	200	205	210	215	220	225	230	250	270
	8" HP	10" HP	kW	l / sec	0,00	41,67	47,22	52,78	55,56	56,94	58,33	59,72	61,11	62,50	63,89	69,44	75,00
				gpm	0	661	749	837	881	903	925	947	969	991	1013	1101	1189
SS 10215/1A	30	-	22	Total Dynamic Head (TDH)	36	26	24	22	21	20	20	19	19	18	17	14	10
SS 10215/01	30	-	22		42	31	29	27	27	26	26	25	24	24	23	20	16
SS 10215/2AA	40	-	30		71	51	48	45	42	41	40	39	38	36	35	27	20
SS 10215/02	50	-	37		84	61	57	55	53	52	51	50	49	48	46	40	33
SS 10215/3AAA	60	-	45		107	77	72	67	63	61	60	58	56	55	52	41	30
SS 10215/03A	70	-	52		119	87	81	77	74	73	71	69	68	66	63	54	43
SS 10215/03	75	-	55		126	92	86	82	80	78	77	75	73	72	69	60	49
SS 10215/04AAAA	80	-	59		142	103	96	89	85	82	79	78	75	73	69	55	40
SS 10215/04AA	90	-	66		155	113	105	99	95	93	91	89	87	84	81	68	53
SS 10215/04	100	-	75		168	122	115	109	106	105	103	100	98	96	92	80	66
SS 10215/05AAA	110	-	81		190	138	129	122	116	114	111	108	105	103	98	81	63
SS 10215/05	125	125	92		209	153	143	137	133	131	128	125	122	120	116	100	82
SS 10215/06	150	150	110		251	184	172	164	159	157	154	150	147	144	139	121	99
SS 10215/07	-	180	132		293	214	200	191	186	183	179	175	171	168	162	141	115
SS 10215/08	-	200	147		335	245	229	219	212	209	205	200	196	192	185	161	131
SS 10215/10	-	250	185		419	306	286	273	265	261	256	250	245	240	231	201	164

COVERCO®

CÔNG TY TNHH THƯƠNG MẠI VÀ CÔNG NGHIỆP NAM MINH
780 Minh Khai, Vĩnh Tuy, Hai Bà Trưng, Hà Nội • Hotline/Zalo 0964 988 688 – 0835 899 599 • bomnuoceu.vn

10” Submersible Pump - SS10215

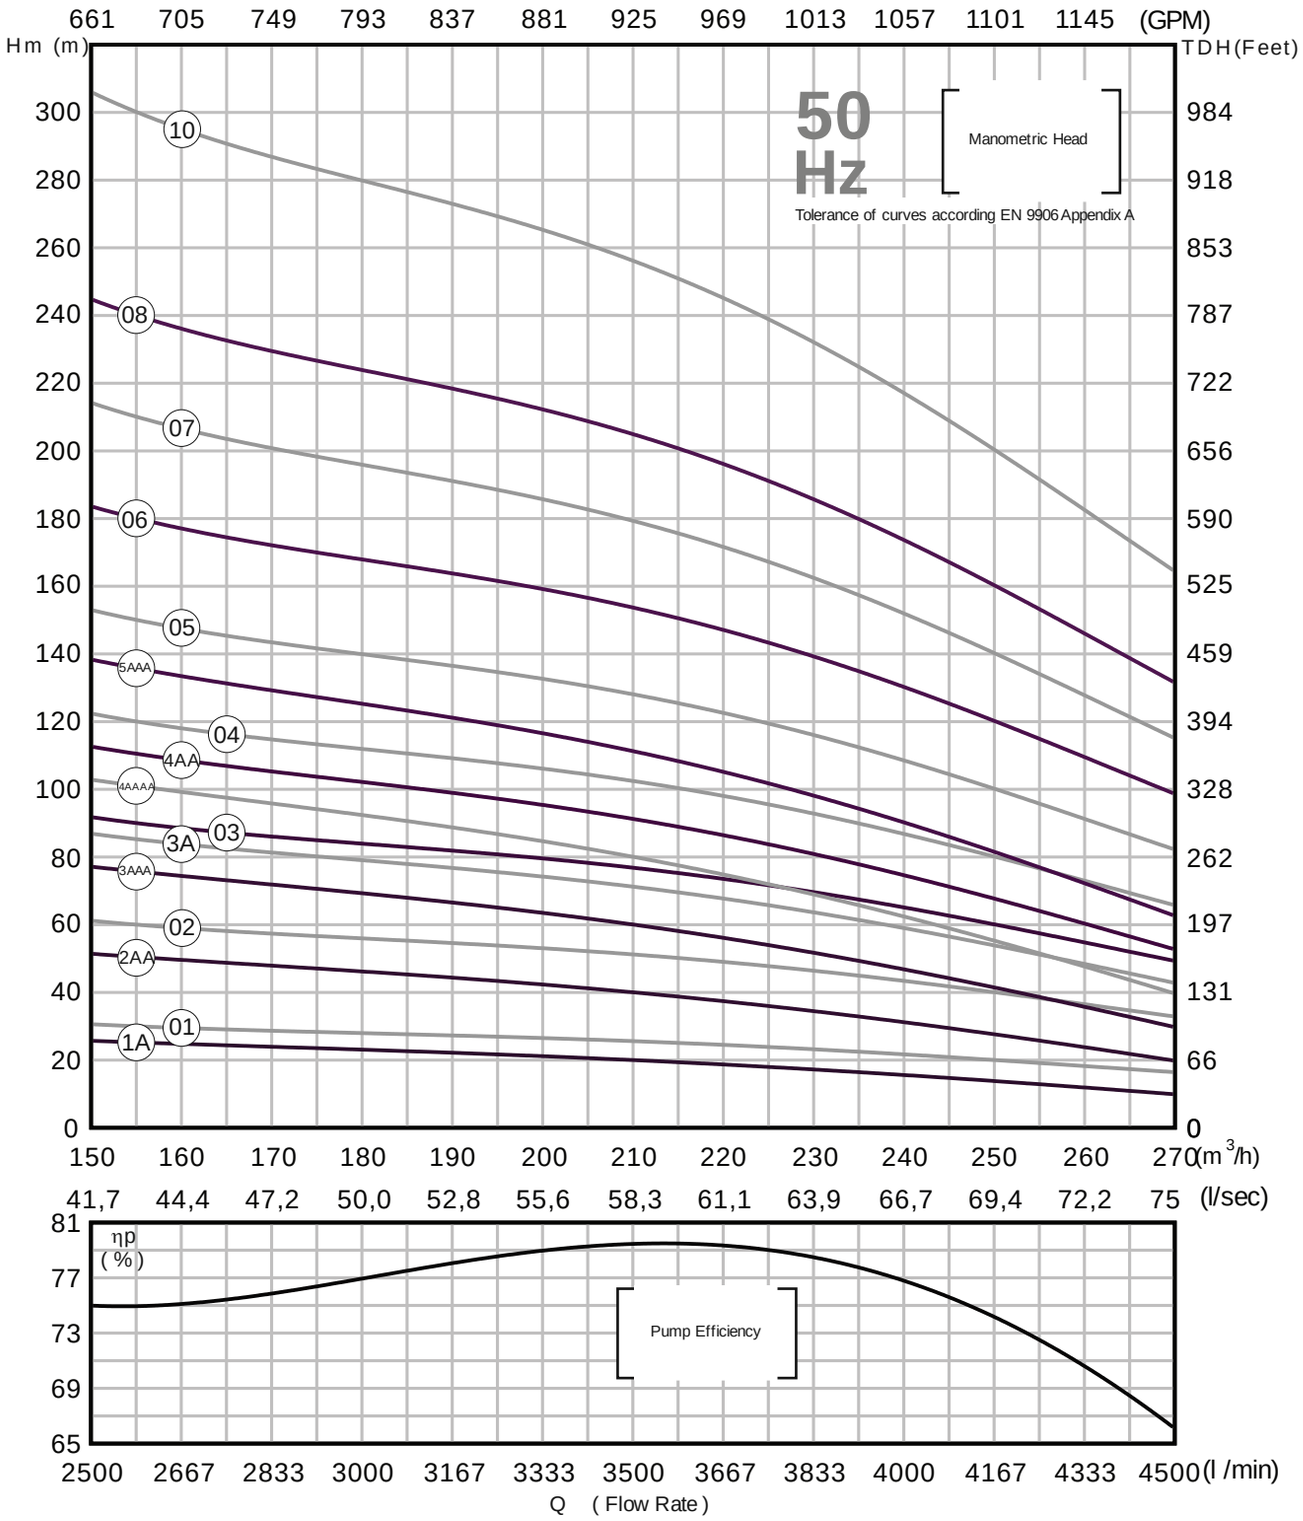

COVERCO®

CÔNG TY TNHH THƯƠNG MẠI VÀ CÔNG NGHIỆP NAM MINH

780 Minh Khai, Vĩnh Tuy, Hai Bà Trưng, Hà Nội • Hotline/Zalo 0964 988 688 – 0835 899 599 • bomnuoceu.vn